


Product Information


2-wire Video Distributor



DESCRIPTION

2-wire system Video Distributor


DIMENSION

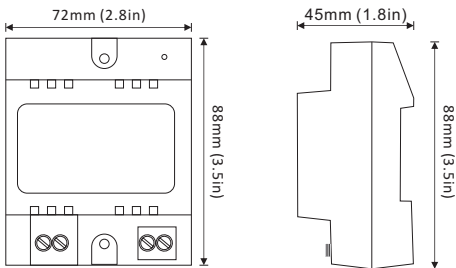

FEATURES

- ▶ Can be used as 4 inputs (Outdoor stations) controller or 4 outputs (Indoor monitor)
- ▶ Separate isolation protection without affecting another devices on the bus system;
- ▶ Short-circuit indication for convenient maintenance;
- ▶ Periodic self-detection mechanism for recovery.

1. Parts and Functions

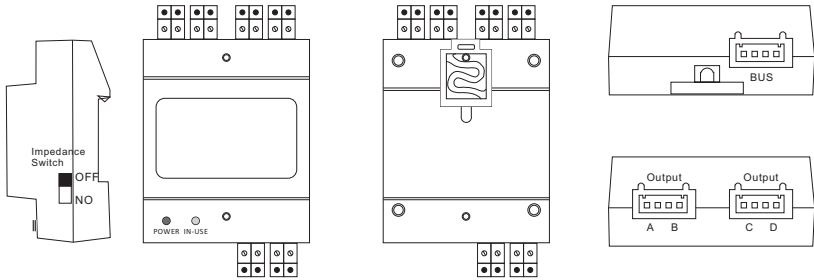

IN-USE: Status indicator, it will light up when it receives a signal.


POWER: Working indicator, it will light up when plugged into a power supply.

Impedance Switch: Video match switch, the last video distributor at the end of the bus should set ON to match the video impedance, the power indicator will turn orange after setting.

Bus: Input port, bus connection port.

A, B, C, D: Output port, connect to indoor monitors or door stations.

2. Installation

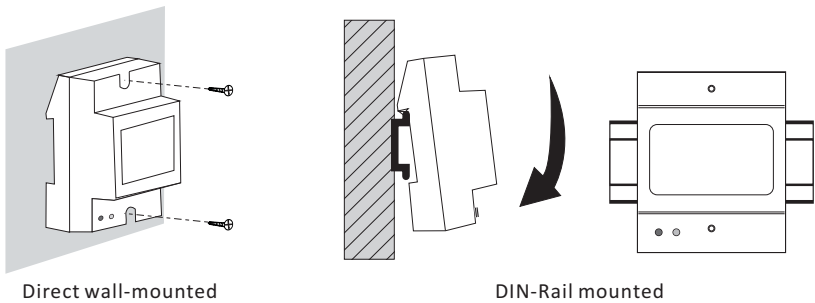

3. Specification

Power supply:	DC20~30V
Working Temperature:	-10°C ~ +40°C
Wiring:	2-wires (Non-polarity)
Dimension:	89(H)×71(W)×45(D)mm